

The cover features a background image of a cellular tower on a hill with autumn foliage. The design is divided into three large diagonal sections: grey in the top-left, blue in the top-right, and red in the bottom-left. The text is centered in the grey section.

 KENWOOD
T E L E C O M
VERIZON
ORDER GUIDE



Kenwood Telecom was founded in 1980 and brings over 40 years of excellence and expertise to our customers. With decades of practical experience and worldwide manufacturing capabilities, we can support your efforts efficiently and cost effectively.

Whether you require a standard bill of materials, long-term project support, streamlined processes, innovative designs or custom engineered solutions, Kenwood Telecom's extensive capabilities provide the precision fabrication and high capacity output to support all of your needs.

Kenwood Telecom's goal is 100% customer satisfaction. Our commitment is to produce materials and provide services that exceed our customer's expectations and to continue to bring great products to the wireless industry.

Thank you for your business.

KENWOOD TELECOM
3431 NOVIS POINTE, ACWORTH, GA 30101
888-439-0500 OFFICE • 770-974-5100 FAX
WWW.KENWOODTELECOM.COM
SALES@KENWOODTELECOM.COM

Self Support/Guy Tower Mount


The following part numbers meet the NTSD-445 standard including all necessary documentation for all North American markets. An engineer letter is available upon request.



T1671KTV

Fits Leg:


Round 1-1/2in OD to 8-1/2in OD Leg
60 Degree Angle 2in to 8-1/2in Leg
90 Degree Angle 2in to 6in Leg

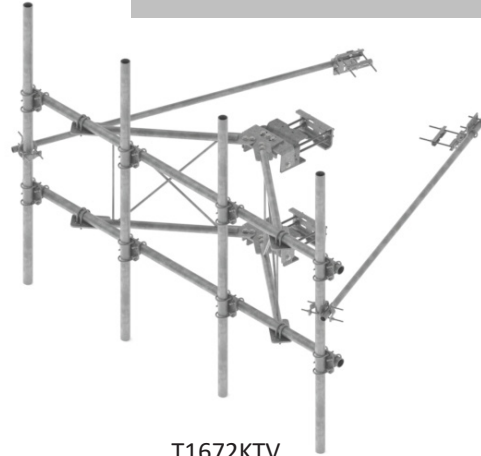

T1672KTV

- 2-7/8in Mast Pipe Sold Separately
- Mount to taper and straight leg

KTC Part Number	Description	Weight(lbs)
T1671KTV12	Sector Frame 3ft Stand-Off 12.5ft Face Pipe	578
T1671KTPV14	Sector Frame 3ft Stand-Off 14.5ft Face Pipe	676
T1672KTV8	Sector Frame 3ft Stand-Off 8ft Face Pipe	534
P1090KT8	2-7/8in OD, 96in long pipe	49

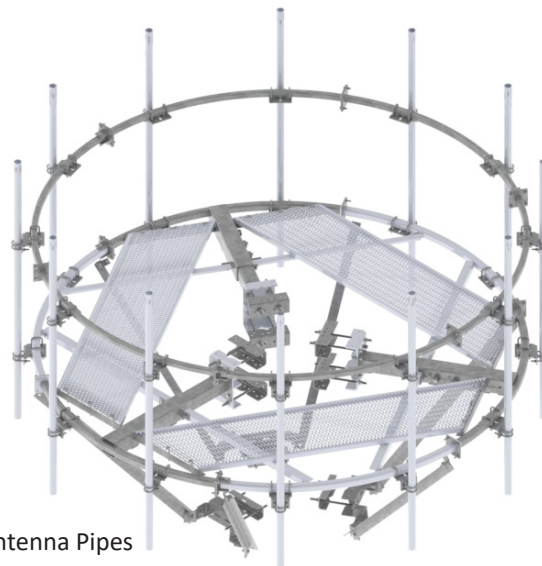


T1515KTR-G

- Antenna Pipes Sold Separately (must order 12)
- Hardware included to mount (12) 2-3/8in or (12) 2-7/8in OD Antenna Pipes
- Design will accommodate virtually any azimuth
- Intended for Straight tower leg only


KTC Part Number	Description	Weight(lbs)
T1515KTR-G	12.7ft Circular platform, guy tower includes reinforcement kit	1885
P1090KT8	2-7/8in OD, 96in long pipe	49

Monopoles Mounts

The following part numbers meet the NTSD-445 standard including all necessary documentation for all North American markets. An engineer letter is available upon request.

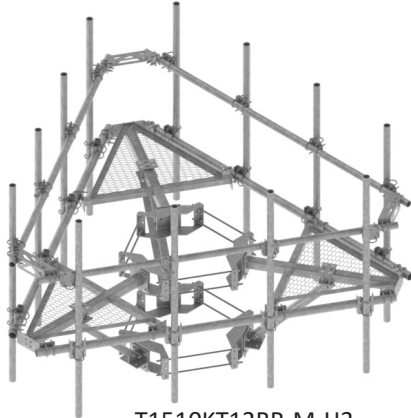

T1510KT12BR-M-H3

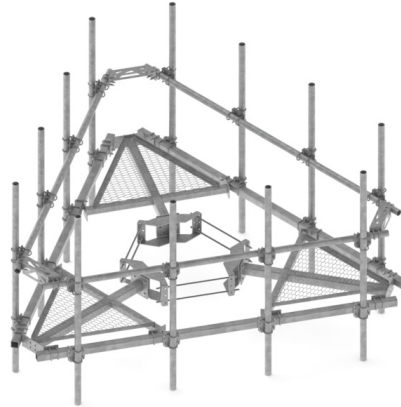


T1512KT12H-12396-M-H3

- Tri-Sector Platform Assembly

KTC Part Number	Description	Weight(lbs)
T1510KT12BR-M-H3	3-1/2in Pipe Face w/ 2-7/8in OD HR and 10in-48in RM, reinforcement kit (2-7/8in Mast Pipe Sold Separately)	1768
T1512KT12H-12396-M-H3	Heavy Duty 12ft Sq Tube Face w/handrail 2-7/8in (12) 96in	2287



T1517KTR12-31296-H-S

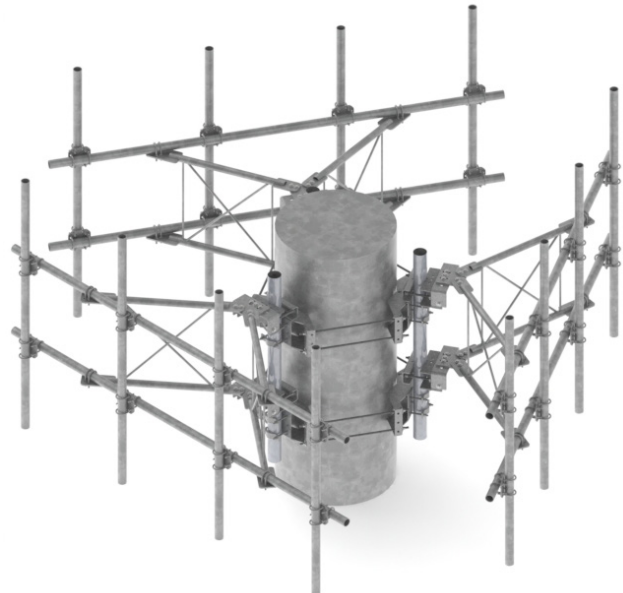

T1671KTV12-3SM



- Quad-Sector Platform Assembly
- 2-7/8in mast pipes included

KTC Part Number	Description	Weight(lbs)
T1508KTR12-12396-S-H	12ft Face, (12) 96in x 2-7/8in OD pipe, reinforcement kit	2711
T1517KTR12-31296-H-S	12ft Face, (12) 96in x 2-7/8in OD pipe, reinforcement kit	2881

KTC Part Number	Description	Weight(lbs)
T1671KTV12-3SM	12ft Face, (12) 96in x 2-7/8in OD pipe, reinforcement kit	2711

Specialty Monopole Mounts


The following part numbers meet the NTSD-445 standard including all necessary documentation for all North American markets. An engineer letter is available upon request.

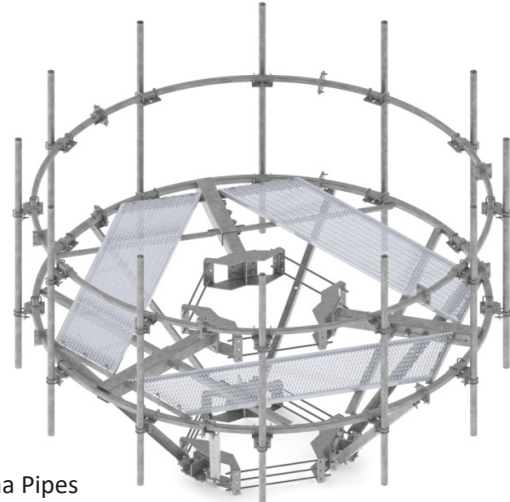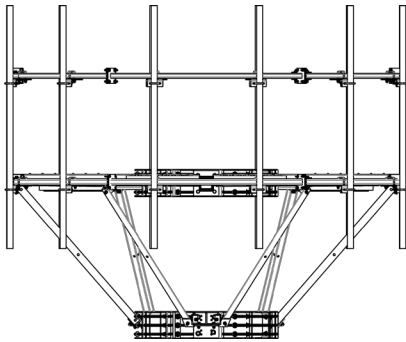

T1515KTR-H-M

- Antenna Pipes Sold Separately (must order 12)
- Hardware included to mount (12) 2-3/8in or (12) 2-7/8in OD Antenna Pipes
- Design will accommodate virtually any azimuth


KTC Part Number	Description	Weight(lbs)
T1515KTR-H-M	12.7ft Circular platform with reinforcement kit	2376
P1090KT8	2-7/8in OD, 96in long pipe	49

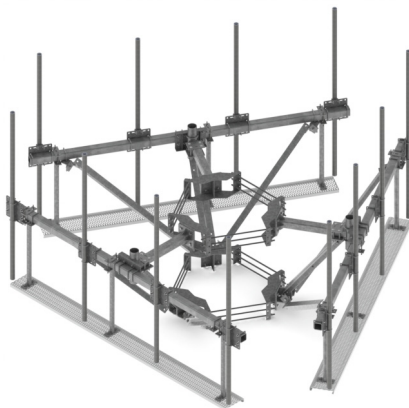

Z2016KTA




T1003KT35A

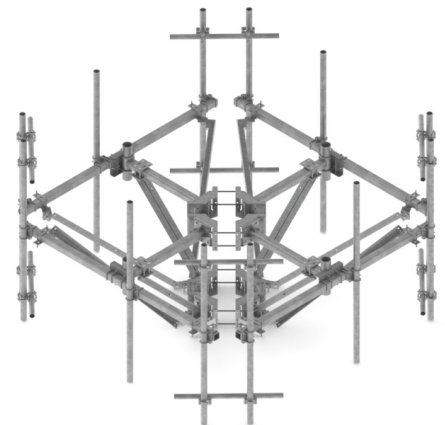


Z2054KTB

KTC Part Number	Description	Weight(lbs)
Z2016KTA	Tri T-arm mount with double reinforcement and work supports, 10-48in collar, (2-7/8in Mast Pipe Sold Separately)	2425
Z2054KTB	Quad T-Arm w/ Double Reinforcement, 10-48in collar, (12) 2-7/8in OD x 8ft Pipes	1632
T1003KT35A	Pipe-to-Pipe Clamp. Joins two 2-3/8in to 5in OD round members. 5/8in x 12in threaded	24

Ice Bridge

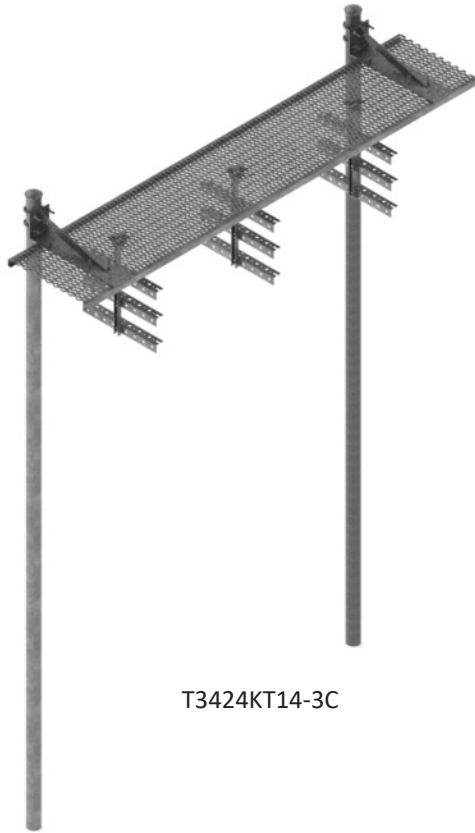

T3424KT14-3C

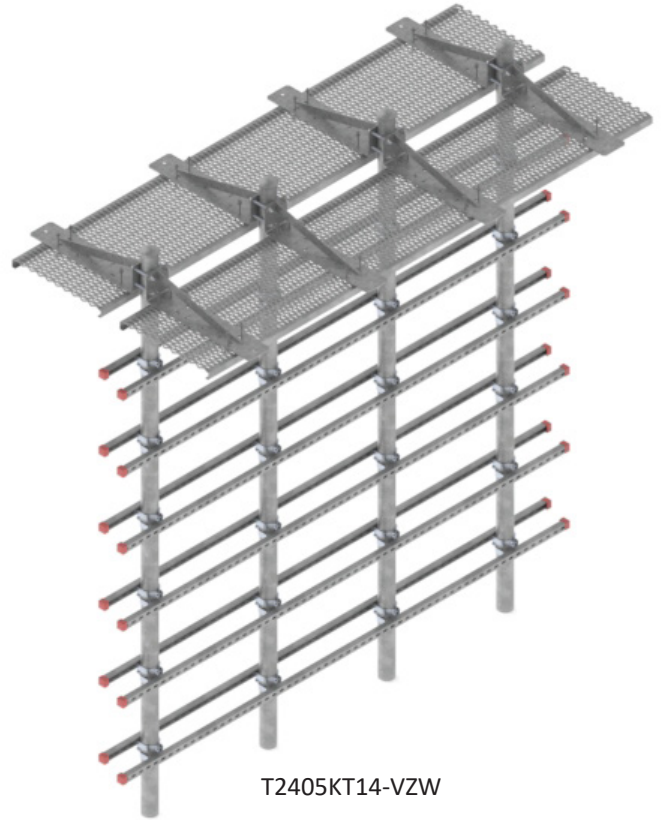

T2405KT14-VZW


KTC Part Number	Bridge	Trapeze level	Trapeze Style	Weight(lbs)
T3424KT14-1	24in x 10ft	1 Level	Channel Style	346
T3424KT14-2	24in x 10ft	2 Level	Channel Style	353
T3424KT14-3	24in x 10ft	3 Level	Channel Style	359

KTC Part Number	Bridge	Trapeze level	Trapeze Style	Weight(lbs)
T3424KT14-1C	24in x 10ft	1 Level	Center Mount	299
T3424KT14-2C	24in x 10ft	2 Level	Center Mount	358
T3424KT14-3C	24in x 10ft	3 Level	Center Mount	367


KTC Part Number	Description	Weight(lbs)
T2405KT14-VZW	Double Ice Bridge Kit 14ft Post, 12 Level H-Frame	1005

Steel Tag

- Stainless Steel embossed dog tags with:
 - Ship Date
 - VZW Meets NSTD-445
 - Site ID included on tag, if available
 - Customer Name

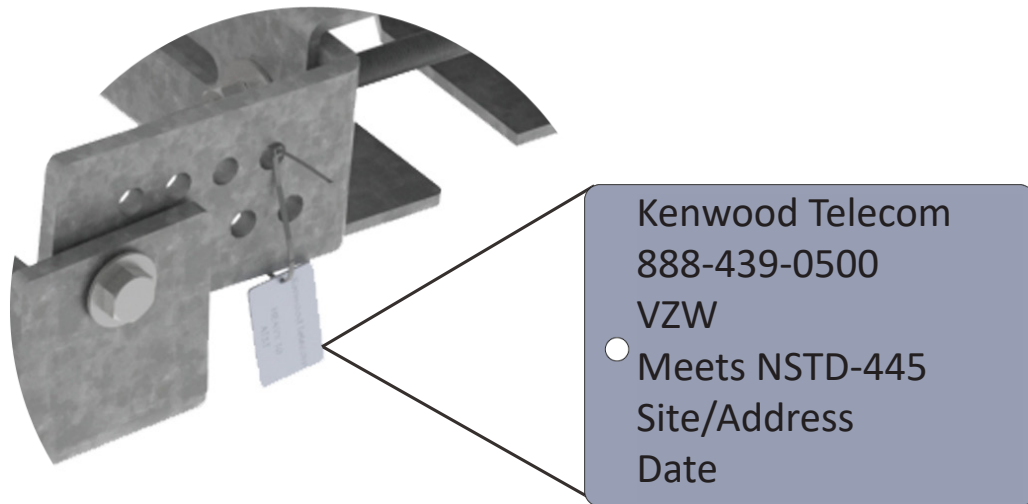

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	K1 672KT-I	Top Leg Clamp Kit for T1671 & 72 Sectors	1
2	K1 672KT-B	Bottom Leg Clamp Kit - T1 671 & 72 Sectors	1
3	K1 671KTV-03	Standoff Weldment: Pipe Sector, HD	2
4	P1090KT12.5	Pipe 2-7/8" OD x 12.5 ft Sch 40 A500/B HDG	2
5	T1709KT11A	Pipe mount crossover plate kit (pair) for 2-7/8"-2-7/8", contains 2 plates, 8 u-bolts and hardware	4
6	T1307KT1512	Universal Stiff arm hardware kit, 1-7/8"OD pipe	2
7	K1 672KTV-HW	Hardware kit for K1PV sectors	1

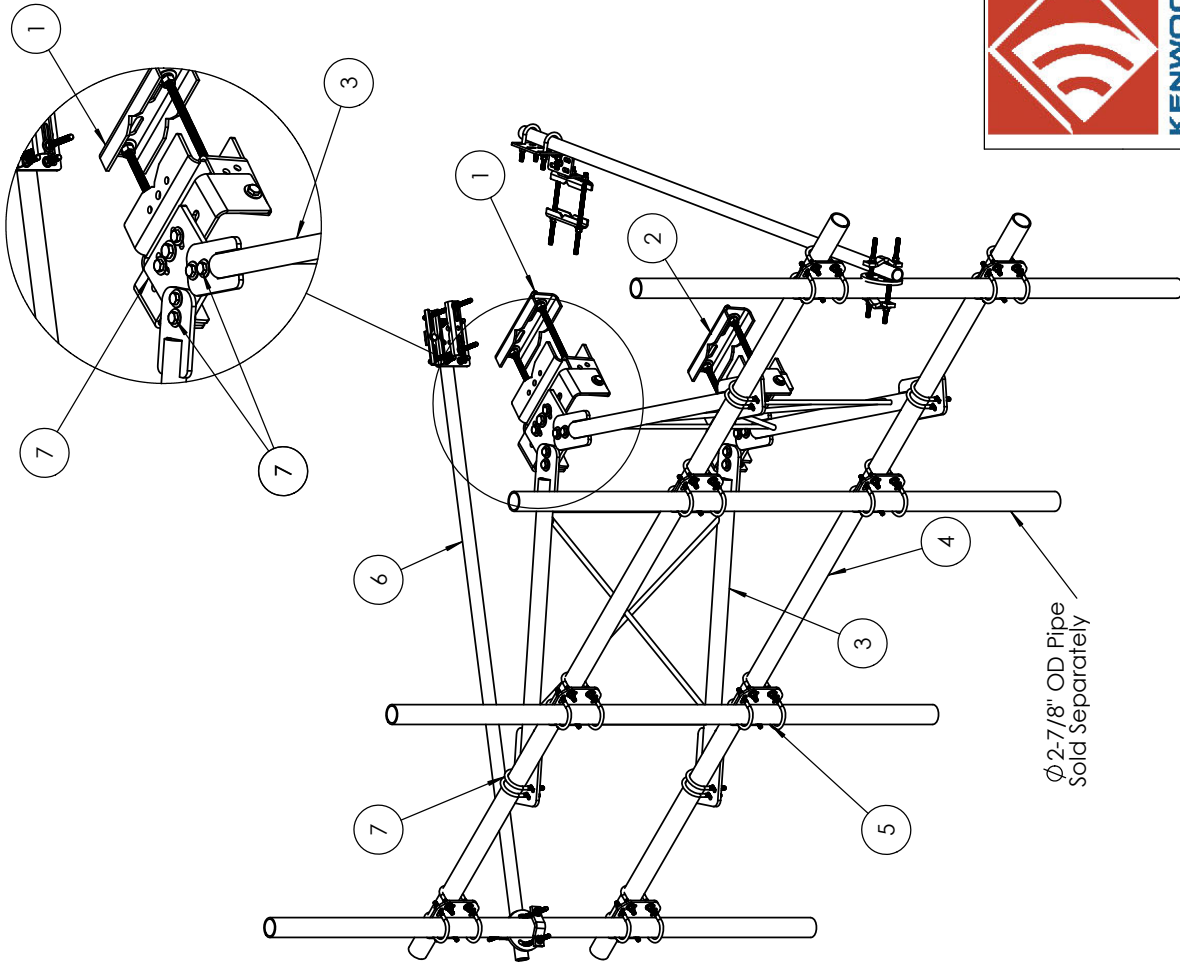

NOTES:

Antenna Pipes should be centered and evenly spaced.

Fits Leg: Round 1-1/2" OD to 8-1/2" OD
60 Degree Angle 2" to 8-1/2"
90 Degree Angle 2" to 6"

Confirm with EOR when mounting on a leg less than 1-1/2" solid diameter or less than P2.5STD tower leg.

Position mount or adjust safety climb cable so not to hinder or damage or obstruct the safety climb. Safety cable routing bracket may be purchased separately.

All fasteners should be tightened to "snug tight" per AISC 6.5.2.

Meets documentation requirements of NSTD-445

Weights:

Without Antenna Pipes - 554.2 lbs
With Antenna Pipes - 740.2 lbs



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FRACTIONAL: 1/32
ANGULAR: 1/2°
ONE PLACE DECIMAL: ± .06
TWO PLACE DECIMAL: ± .03
THREE PLACE DECIMAL: ± .010
INTERPRET GEOMETRIC TOLERANCING PER:
MATERIAL:
FINISH:
DO NOT SCALE DRAWING

NAME: KAR DATE: 9/16/21
DRAWN: CHECKED: ENG APPR: MFG APPR:
PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.




TITLE:

Sector Frame - 3' Standoff,
12'6" Face, All Pipe Version


SIZE	DWG. NO.	REV
	T1671KTV12	A
SCALE: 1:18	FINISHED WEIGHT: See Note	SHEET 1 OF 2

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	T1515KT-G	Circle Platform, Guyed Tower	1
2	K1672KT-04	Leg Channel, Inner (Heavys)	3
3	K1672KT-03F	Leg Channel Bottom Clamp, Formed	3
4	Z2026KT-07	Support Angle for Stabilizer Kits, 72"	6
5	K9970KT-95	Corner, Clip: 3 x 3 x 3/16, 2" long	6
6	Z2031KT-B	Angle, T-arm Stabilizer	12
7	K2320KT18i	Threaded rod 3/4"x18", HDG, ASTM A193 B7	6
8	H3012KT34GSA3	Flat washer, 3/4", SAE (A325), HDG	12
9	H3002KT34G	Lock washer, 3/4", HDG	12
10	H2002KT34GA3	Nut, 3/4" HH, HDG (A325)	12
11	H1029KT2GA3	Bolt, 5/8"x2", hex, A325, HDG	24
12	H3012KT58GSA3	Flat washer, 5/8", SAE (A325), HDG	24
13	H3002KT58G	Lock washer, 5/8", HDG	24
14	H2002KT58GA3	Nut, hex heavy 5/8" HDG A325	24

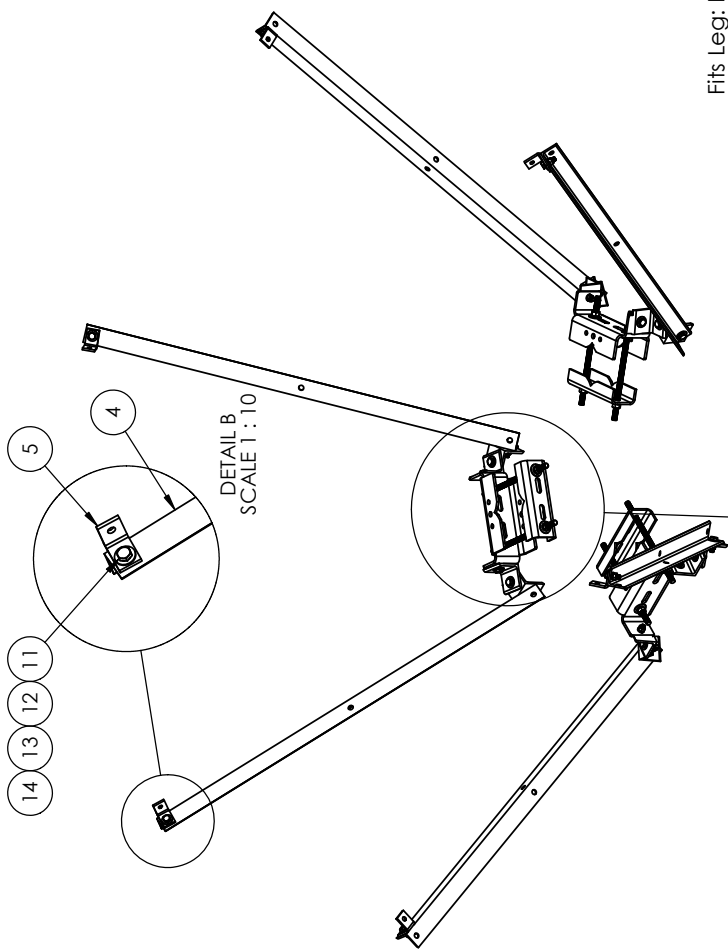

Fits Leg: Round 1-1/2" OD to 8-1/2" OD
60 Degree Angle 2" to 8-1/2"
90 Degree Angle 2" to 6"

Fits Tower Face: 18" up to 62" face width

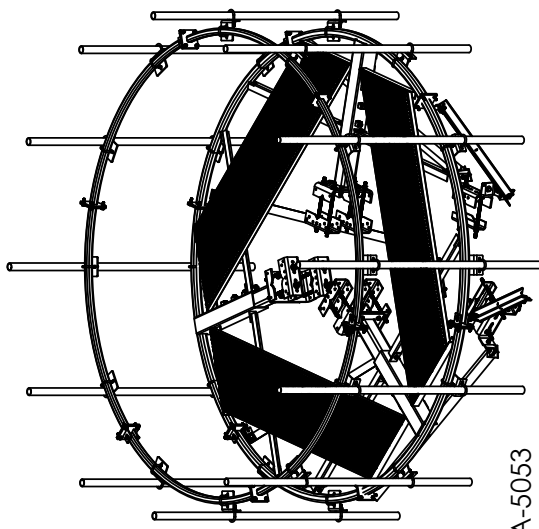

Mount Design Criteria ANSI/TIA-222-H-2017 on TIA-5053



UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES	
FRACTIONAL: 1/32	
ANGULAR: ± 2°	
ONE PLACE DECIMAL: ± .06	
TWO PLACE DECIMAL: ± .03	
THREE PLACE DECIMAL: ± .010	
INTERPRET GEOMETRIC TOLERANCING PER:	
MATERIAL:	
FINISH:	
DO NOT SCALE DRAWING	

NAME	DATE
KAR	4/19/19
DRAWN	CHECKED
ENG APPR.	MFG APPR.
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.	

KENWOOD TELECOM

TITLE:



Reinforcement Kit
Circle Platform, Guyed Tower

SIZE	DWG. NO.	REV
B	T1515KTR-G	B

SCALE: 1:20 FINISHED WEIGHT: 2550 lbs

SHEET 1 OF 2

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	T1510KT1B	Low profile co-lo platform, 12ft-6 fac	1
2	T1511KT312P	Colo-platform handrail kit 2.5 STD (2-7/8"OD)	1
3	T1730KT-M	Stabilizer/Support Assembly for existing monopole mounts 10-48" OD	1
4	T1503KT48A	Universal ring mount 10"-48"	1
5	T1721KT1A	Pipe mount kit, channel 2-7/8" to 3-1/2"	12

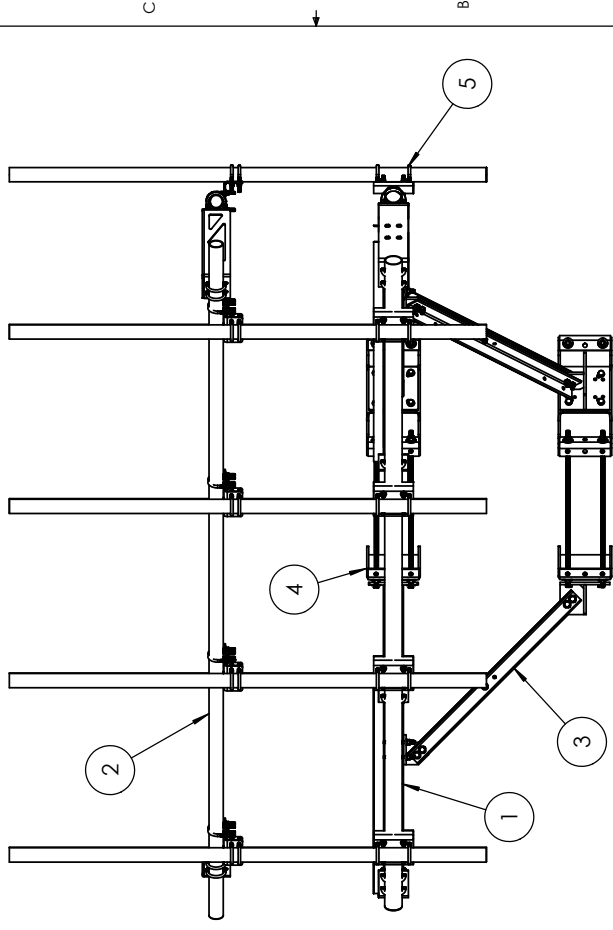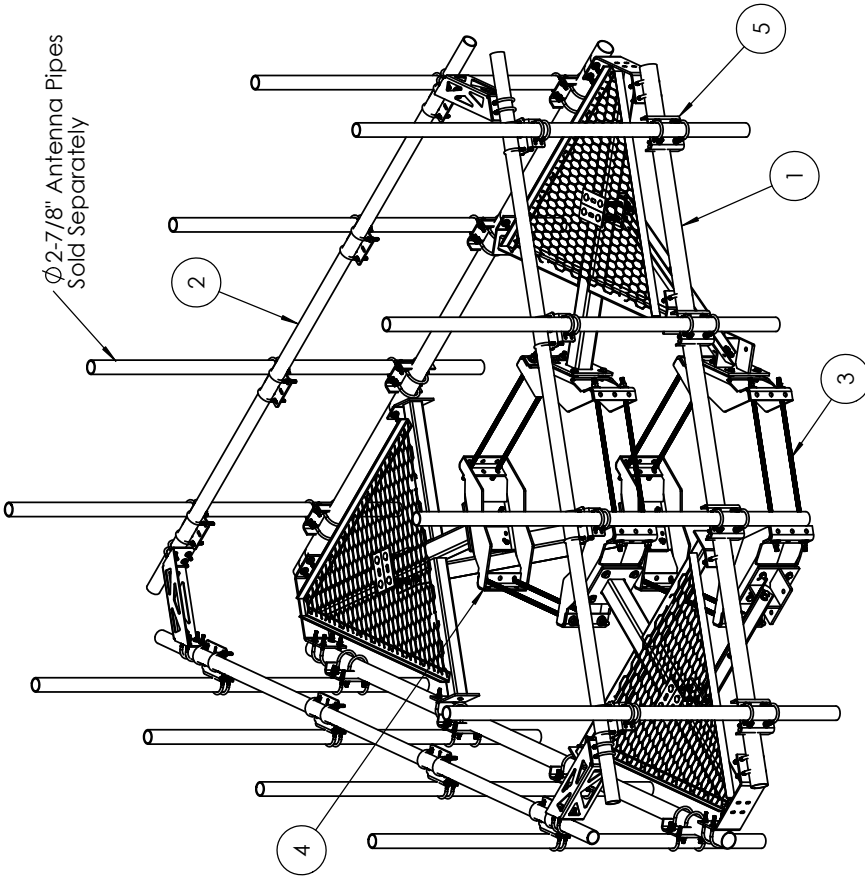

Mount Design Criteria ANSI/TIA-222-H-2017 and TIA-5053 sec 2.3

T1510KT12BR-M-H3	Calculations	NO ICE	with 1/2" ICE
	Dead Load	1774.23 lbs	2624.23 lbs
	Combined EPA (w) (ft)	37.55	46.30
	Combined EPA (t) (ft)	27.48	35.21

*NOTE: EPA and Weight calculations do not include antenna pipes



KENWOOD TELECOM
3431 Nova Pointe, Acworth, GA 30101
(770) 775-5550 • Fax: (770) 774-5100

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/32 ANGULAR: ± 2° ONE PLACE DECIMAL: ± .06 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL: ± .010	DRAWN	CHECKED	ENG APPR.	MFG APPR.
NAME	KAR			
DATE	5/26/20			
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION OR TRANSMISSION IN ANY FORM OR BY ANY MEANS WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.				
MATERIAL FINISH				
DO NOT SCALE DRAWING				




KENWOOD TELECOM

TITLE:
Platform Assembly, 3-1/2in Pipe
Face w/ 2-7/8in OD HR and 10in-48in RM, 2-7/8 hardware and stabilizing kit

SIZE DWG. NO. REV
T1510KT12BR-M-H3 -

SCALE: 1:25 FINISHED WEIGHT: SHEET 1 OF 1

Mount Design Criteria ANSI/TIA-222-H-2017 on TIA-5053

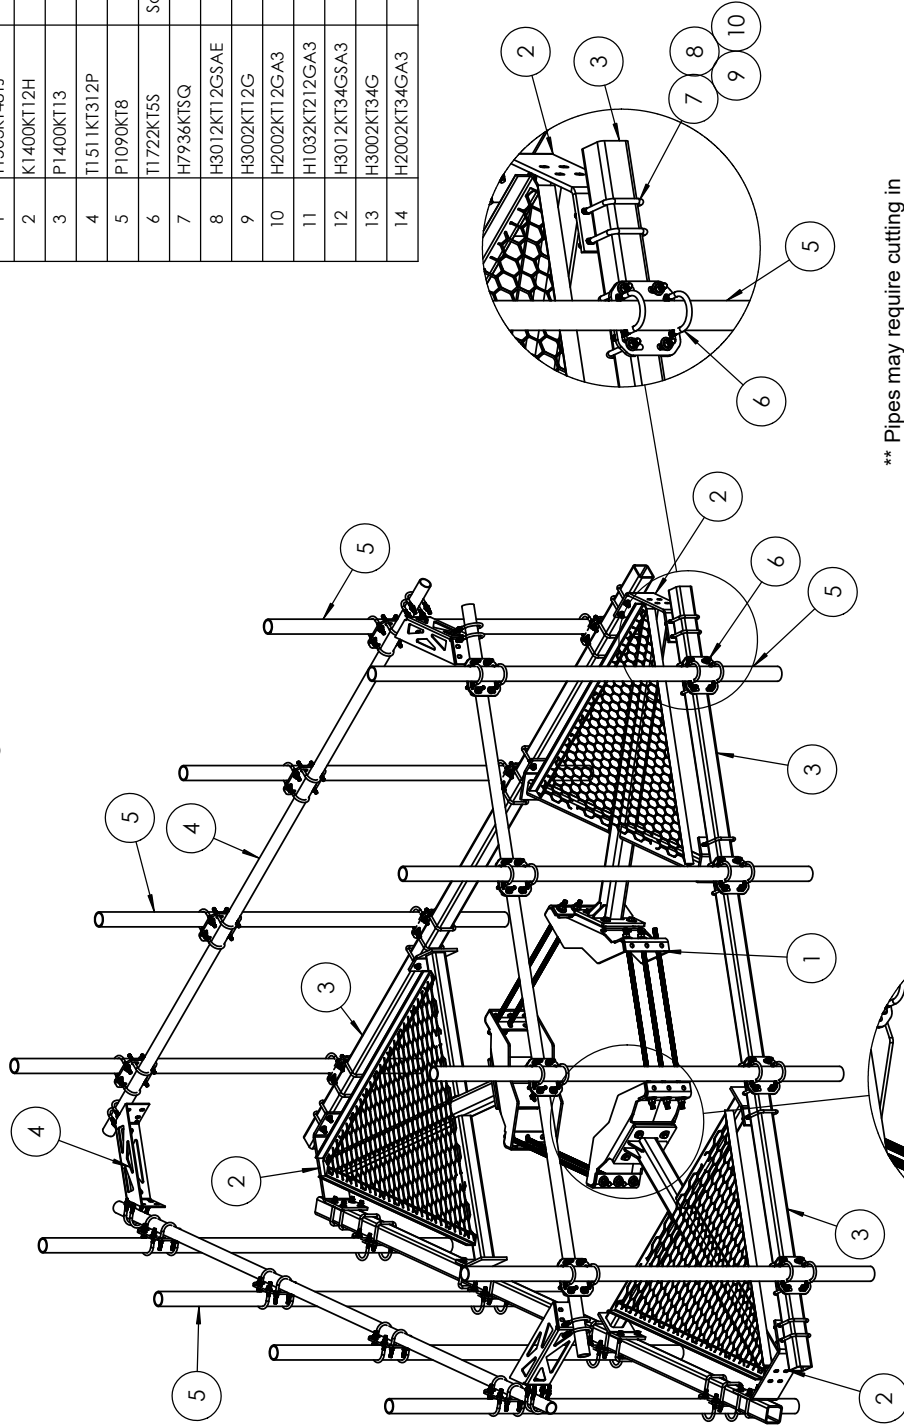

Available holes can be used for 5,000 lbs Maintenance Tie-off. DO NOT tie-off to threaded rod.

** Pipes may require cutting in the field. If pipe is cut, use Zinga for galvanizing

NOTES:

Antenna Pipes should be centered and evenly spaced.

Fits Pole: 10-48" OD

Confirm with EOR when mounting on a leg less than 1-1/2" solid diameter or less than P2.5STD tower leg.

Position mount or adjust safety climb cable so not to hinder or damage or obstruct the safety climb. Safety cable routing bracket may be purchased separately.

All fasteners should be tightened to "snug tight" per AISC 6.5.2.

Meets documentation requirements of NSTD-445

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	T1503KT48TJ	Universal ring mount 10"-48" Kit	1
2	K1400KT12H	Platform Assembly, 12" face, Heavy Duty	3
3	P1400KT13	Sq. tube, 13"x3.5"x3.5", 1/4" wall, HDG	3
4	T1511KT312P	Colo Pltfm Handrail Kit, 2-7/8 ODx12...5	1
5	P1090KT8	Pipe, 2-7/8" OD x 8" HDG	12
6	T1722KT5S	Square tube pipe mount, 2-7/8" OD x 3.5" sq tube	12
7	H7936KTSQ	U-Bolt sq, 1/2"Dx5-1/4"Lx3-5/8"IL, 2" T HDG	18
8	H3012KT12GSAE	Flat washer, hardened, 1/2", SAE, HDG	36
9	H3002KT12G	Lock washer, 1/2" HDG	36
10	H2002KT12GA3	Nut, hex heavy 1/2" HDG A325	36
11	H1032KT12GA3	Bolt, 3/4" x 2-1/2" (A325) HH HDG	12
12	H3012KT34GSA3	Flat washer, 3/4", SAE (A325), HDG	12
13	H3002KT34G	Lock washer, 3/4", HDG	12
14	H2002KT34GA3	Nut, hex heavy 3/4" HDG A325	12






UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL: 1/32 ANGULAR: ± 2° ONE PLACE DECIMAL: ± .06 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL: ± .010 INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL: FINISH: DO NOT SCALE DRAWING	DRAWN CHECKED ENG APPR. MFG APPR.	NAME KAR	DATE 12/10/19
---	--	-------------	------------------

PROPERTY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.

	TITLE: Platform Assembly, Heavy Duty 12" Sq Tube Face w/Handrail Ø2-7/8" (12) 96" Ø2-7/8" Antenna Pipes	SIZE DWG. NO. REV	T1512KT12H-12396-M-H3 E
SCALE: 1:24 FINISHED WEIGHT: 2183.48		SHEET 1 OF 1	

ITEM NO.	PART NUMBER	DESCRIPTION
1	T1508KT12-12396-S-H	Quad Platform, 12ft pipe face, w/Handrail, ring mount, and pipes
2	T1504KT40A	Quad mount, 10-40" w/mount hardware
3	T1730KTS	Stabilizer/Support Assembly-Single Arm w/o collar

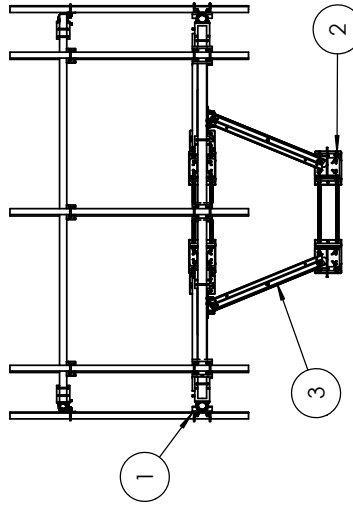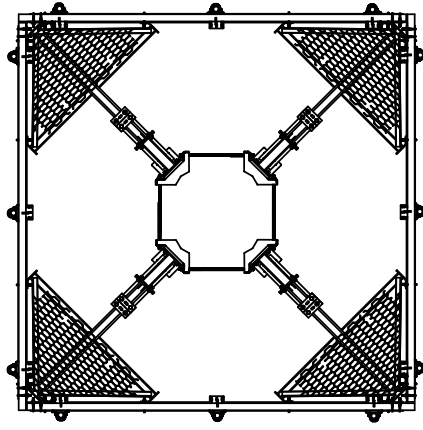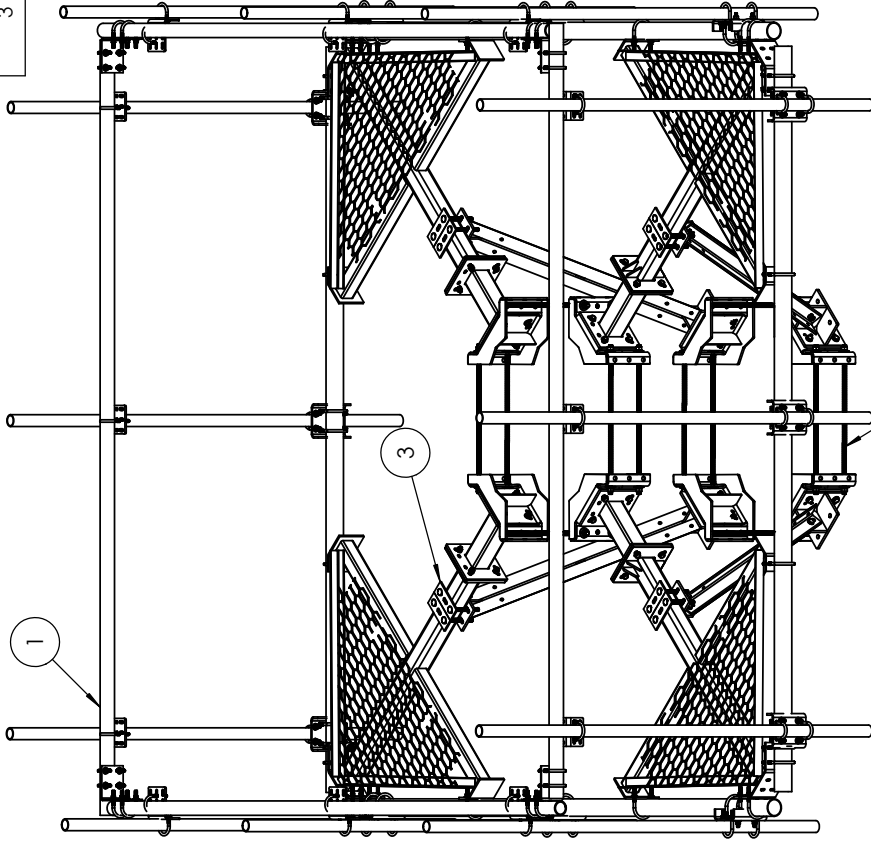

KENWOOD
3431 Noyes Pointe, Acworth, Ga 30101
(770) 775-6500 Office (770) 774-5100 Fax

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL: $\pm 1/32$
ANGULAR: $\pm 2^\circ$
ONE PLACE DECIMAL: $\pm .06$
TWO PLACE DECIMAL: $\pm .03$
THREE PLACE DECIMAL: $\pm .010$

INTERPRET GEOMETRIC
TOLERANCING PER:

MATERIAL:

FINISH:

DO NOT SCALE DRAWING

NAME: KAR
DATE: 1/22/20
DRAWN: CHECKED: ENG APPR: MFG APPR:



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
KENWOOD TELECOM. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN PERMISSION OF
KENWOOD TELECOM IS
PROHIBITED.

KENWOOD TELECOM

TITLE:
Quad platform w/hand rail,
Ring Mount, Antenna Pipes
and Stabilizer

SIZE: DWG. NO. REV
B T1508KTR12-12396-S-H
SCALE: 1:25 FINISHED WEIGHT: 2335.40 SHEET 1 OF 2

ITEM NO.	PART NUMBER	DESCRIPTION
1	T1517KT12-31296-H-S	Quad Platform, 12' Square Tube Face (12) 96 pipes with 10-48 Ring Mount & Hand Rail
2	T1504KT40A	Quad mount, 10-40" w/mount hardware
3	T1730KTS	Stabilizer/Support Assembly-Single Arm w/o collar

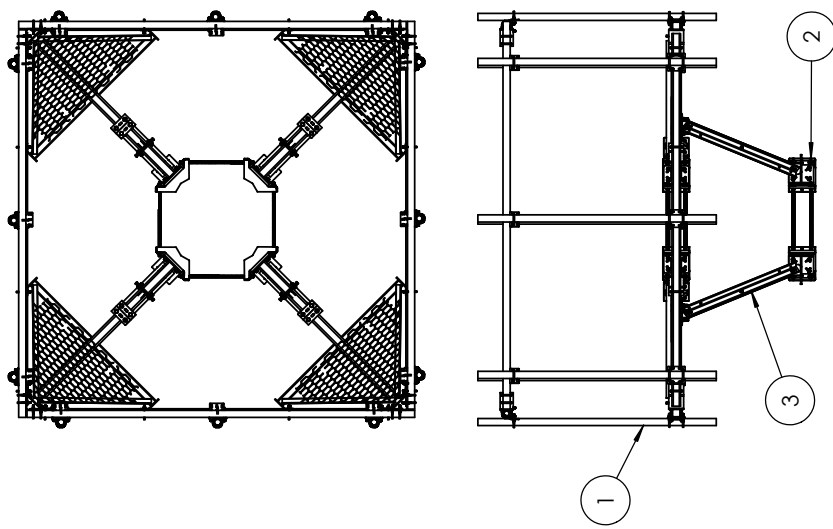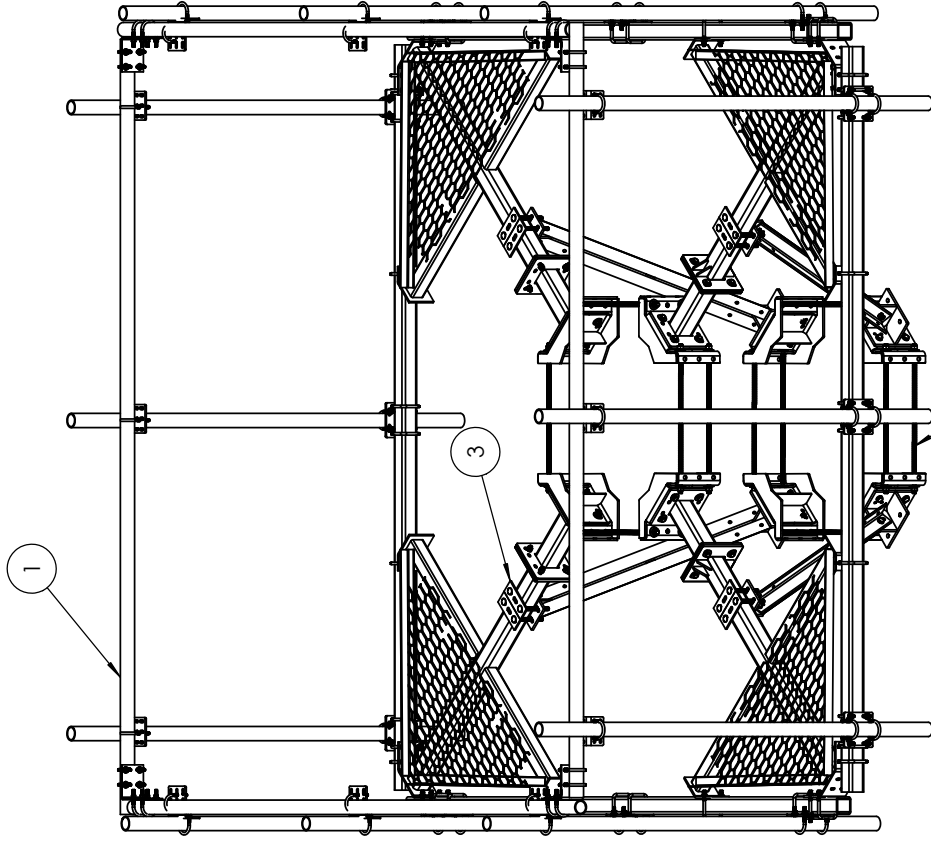


UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL: $\pm 1/32$ ANGULAR: $\pm 2^\circ$ ONE PLACE DECIMAL: $\pm .06$ TWO PLACE DECIMAL: $\pm .03$ THREE PLACE DECIMAL: $\pm .010$		NAME KAR	DATE 1/22/20
DRAWN		CHECKED	ENG APPR.
MFG APPR.		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.	
MATERIAL		FINISH	
DO NOT SCALE DRAWING		DO NOT SCALE DRAWING	

KENWOOD TELECOM TITLE: Quad Platform, 12' Square Tube Face (12) 96" pipes with 10-48" Ring Mount & Hand Rail		SIZE B	DWG. NO. T1517KTR12-31296-H-S	REV
SCALE: 1:25 FINISHED WEIGHT: 3368.95		SHEET 1 OF 2		


Mount Design Criteria ANSI/TIA-222-H-2017 and TIA-5053

ITEM NO.	PART NUMBER	DESCRIPTION	Monopole Version/QTY.
1	T1515KT-H-M	Circular Platform with Handrail, for up to 48" diameter poles	1
2	T1503KT48TA	Universal ring mount 10"-48" Kit	1
3	Z2026KT-01	Mounting Weldment, T-arm Stabilizer	3
4	Z2026KT-07	Support Angle for Stabilizer Kits, 72"	6
5	K9970KT-95	Corner, Clip: 3 x 3 x 3/16; 2" long	6
6	Z2031KT-B	Angle, T-arm Stabilizer	12
7	H1029KT2GA3	Bolt, 5/8"x2", hex, A325, HDG	24
8	H3012KT58GSA3	Flat washer, 5/8", SAE (A325), HDG	24
9	H3002KT58G	Lock washer, 5/8", HDG	24
10	H2002KT58GA3	Nut, hex heavy 5/8" HDG A325	24
11	K1029KT214-4	5/8" x 2-1/4" A325 bolt kit (4 bolts)	3

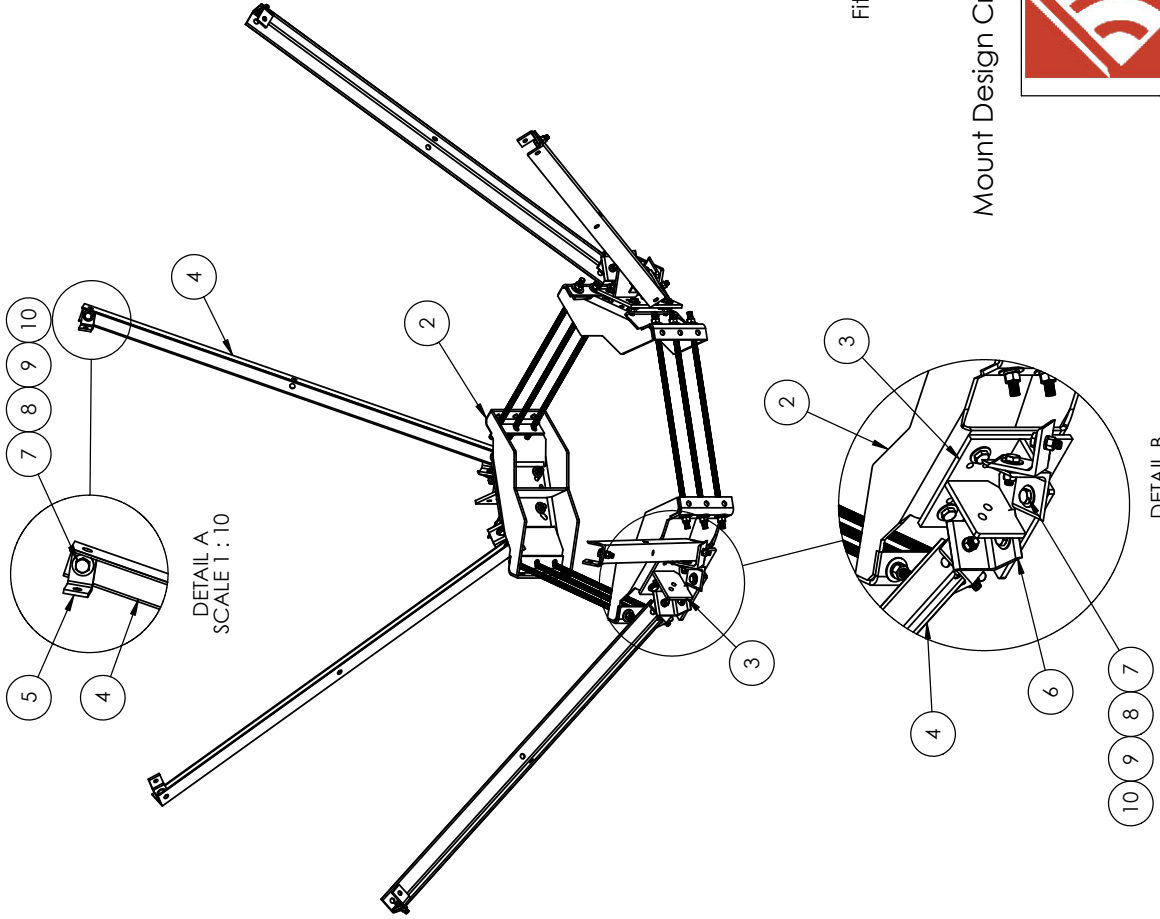

Fits Monopole: 10" to 48" OD

Mount Design Criteria ANSI/TIA-222-H-2017 on TIA-5053

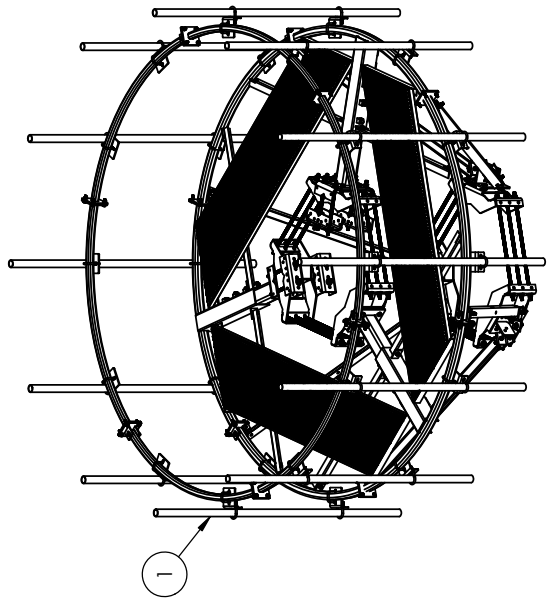

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES	
FRACTIONAL: $\pm 1/32$	DECIMAL: $\pm .005$
ANGULAR: $\pm 2^\circ$	
ONE PLACE DECIMAL: $\pm .06$	
TWO PLACE DECIMAL: $\pm .03$	
THREE PLACE DECIMAL: $\pm .010$	
INTERPRET GEOMETRIC TOLERANCING PER:	
MATERIAL:	
FINISH:	
DO NOT SCALE DRAWING	


NAME	DATE
KAR	5/22/19
DRAWN	CHECKED
ENG APPR.	MFG APPR.
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.	

 KENWOOD TELECOM	
TITLE:	
Reinforcement Kit	
Circle Platform, Monopole	
SIZE	REV
B	B
DWG. NO. T1515KT-H-M	
SCALE: 1:20 FINISHED WEIGHT: 2550 lbs	
SHEET 1 OF 2	

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	T1504KT40A	Quad mount, 10-40" w/mount hardware	2
2	T1711KT48B	48" T-arm with arm hardware	4
3	P1400KT10	Sq. tube, 10"x3.5"x3.5", 1/4" wall, HDG	4
4	K11150KT2	Pipe frame X plate for 36" T-arm	4
5	T1730KTS	Stabilizer/Support Assembly-Single Arm w/o collar	4
6	T1722KT15S	Square tube pipe mount, 2-7/8" OD x 3.5" sq tube	12
7	P1090KT8	Pipe, 2-7/8in O.D. x 8ft L HDG	12
8	K4000KT	Plate for work support T-arm	16
9	Z2031KT-B	Angle, T-arm Stabilizer	32
10	Z2026KT-07	Support Angle for Stabilizer Kits, 72"	8
11	K1004KT1	Crossover clamp kit, 2-3/8" x 2-3/8"	16
12	P1000KT4	Pipe, 2-3/8in x 4ft Sched 40, A500/B HDG	8
13	K7936KTSQ-2	Sq U-bolt kit, 3-1/2" Tube (2 U-bolts)	8
14	K2120KT9i	Threaded rod 1/2" x 9", HDG	16
15	H3012KT12GSAE	Flat washer, 1/2", SAE (A325), HDG	32
16	H3002KT12G	Lock washer, 1/2" HDG	32
17	K7941KT1-4	U-bolt kit, 5/8" for 4-1/2" pipe, (4 U-bolts)	2
18	H2002KT12GA3	Nut, 1/2" HH, HDG (A325)	32
19	H1029KT2GA3	Bolt, 5/8"x2", hex, A325, HDG	40
20	H3012KT58GSA3	Flat washer, 5/8", SAE (A325), HDG	40
21	H3002KT58G	Lock washer, 5/8", HDG	40
22	H2002KT58GA3	Nut, hex heavy 5/8" HDG A325	40

Note:

Antennas and antenna pipes should be centered and evenly spaced along the face

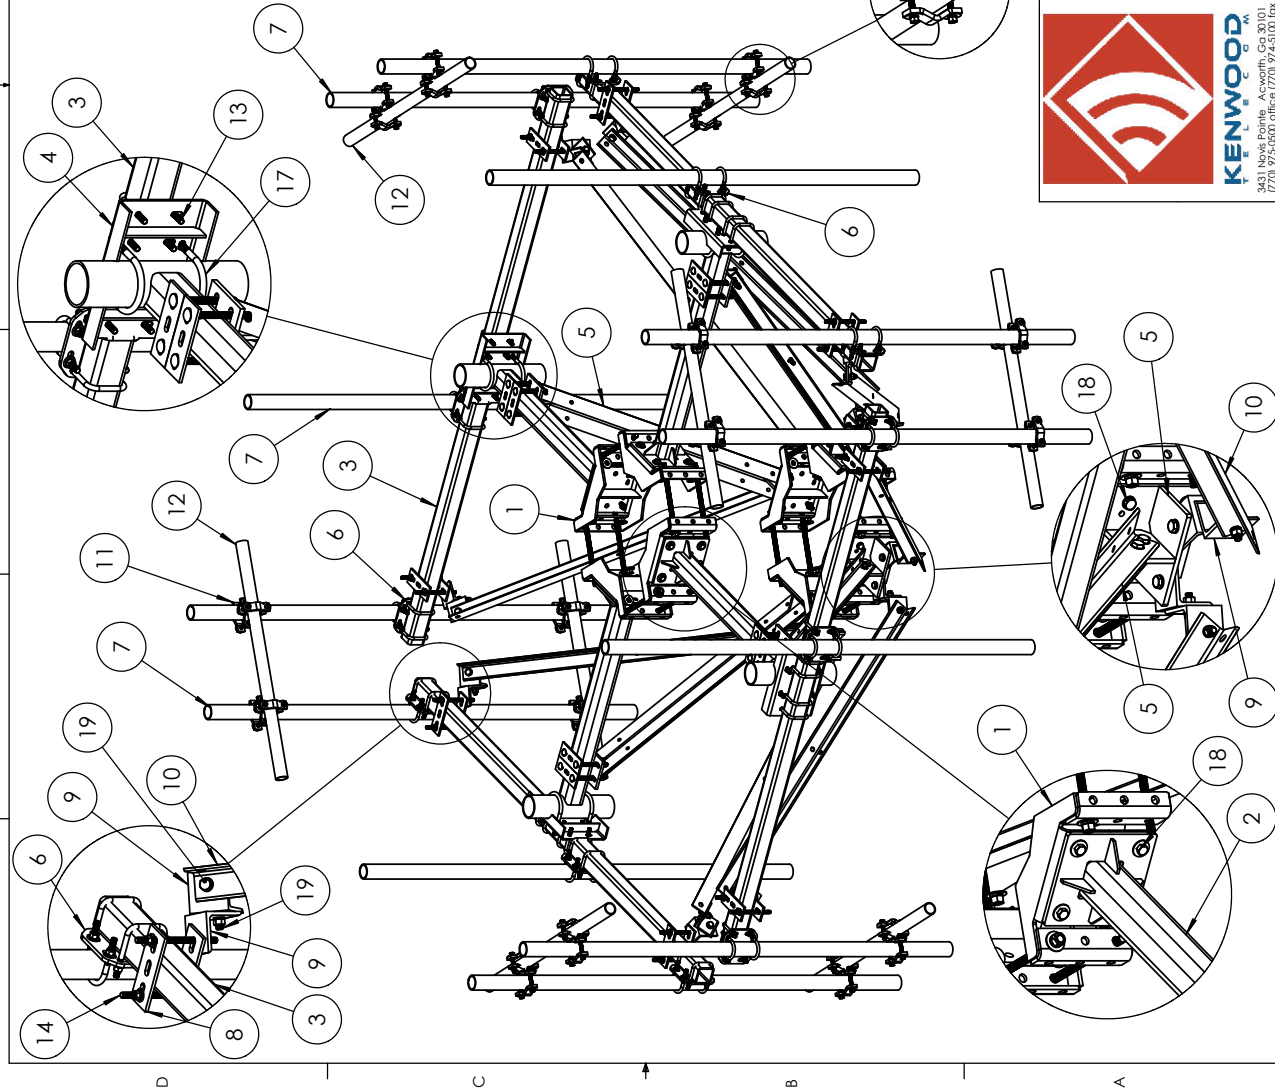



3431 Nove Pointe Acworth, Ga 30101
(770) 775-5500 Office (770) 774-5100 Fax

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
FRACTIONAL: 1/32
ANGULAR: ± 2°
ONE PLACE DECIMAL: ± .06
TWO PLACE DECIMAL: ± .03
THREE PLACE DECIMAL: ± .010

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL:

FINISH:

DO NOT SCALE DRAWING

		NAME KAR	DATE 1/30/24
DRAWN 	CHECKED 	ENG APPR. 	MFG APPR.
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.			
TITLE: Quad T-Arm w/ Double Reinforcement w/ (12) 2-7/8" OD Pipes		SIZE DWG. NO. Z2054KTB	REV B
SCALE: 1:36 FINISHED WEIGHT: 2952.29		SHEET 1 OF 2	


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	T1503KT48TA	Universal ring mount 10"-48" Kit	1
2	K1350KTHD	T-arm, 36" w/ hole, Heavy Duty	3
3	T2016KT-02B	Sq Tube Pipe HW Kit w/ Plates and Bolts	3
4	P1461KIT13	4" x 5/16" x 13" square tube HSS, HDG	3
5	T1730KT-MT	Stabilizer Assembly, 10-48" MP, triple rod	1
6	T1521KT45SQ	Grating plank kit for 4" sq tube, 12'	3
7	K4000KT	Plate for work support T-arm	12
8	Z2031KT-B	Angle, T-arm Stabilizer	24
9	Z2026KT-07	Support Angle for Stabilizer Kits, 72"	6
10	H7940KT16SQ	Square U-Bolt for 4" Sq Tube	1
11	H3012KT12GSAE	Flat washer, hardened, 1/2", SAE, HDG	50
12	H3002KT12G	Lock washer, 1/2" HDG	52
13	H2002KT12GA3	Nut, hex heavy 1/2" HDG A325	50
14	K1029KT214-4	5/8" x 2-1/4" A325 bolt kit (4 bolts)	3
15	K1029KT2-8	A325 5/8"x2" bolt kit (8)	4
16	K1710KT	Cross pipe plate, 2.5"x3.5"x4.5"	12
17	H7941KT4	U-Bolt, 1/2-13, 4" Lng; 2-1/2"IL x 2" Tnd; HDG	24
18	K2120KT9I	Threaded rod 1/2" x 9", HDG	12
19	H2002KT12GA3	Nut, 1/2" HH, HDG (A325)	22
20	H3002KT12G	Lock washer, 1/2" HDG	22
21	H3012KT12GSAE	Flat washer, 1/2", SAE (A325), HDG	22

Designed in accordance with TIA-222-G-4


- Structure Height < 400 feet • Structure Class or Risk I or II
- Galvanized Steel, A123
- Exposure Category B or C
- Topographic Category 1
- Maximum 140 mph, 50-year return, 3-second gust basic wind speed
- Maximum 180 mph, ultimate 3-second wind speed based on risk category
- Maximum 1 inch, 50-year return design ice thickness
- Maximum 2 inch, ultimate design ice thickness based on risk category
- Maximum 60 mph basic wind speed occurring simultaneous with ice
- Factored wind pressure without ice at mounting elevation a(qz) (Gh) ≤ 135 psf
- Factored ice thickness at mounting elevation tiz ≤ 2.75 inches
- Factored wind pressure with ice at mounting elevation a (qz) (Gh) ≤ 15 psf

Mount Certified for the Following Mount Classes

VERIZON
M1400R-4[6]
M1250R (J) -4[6]

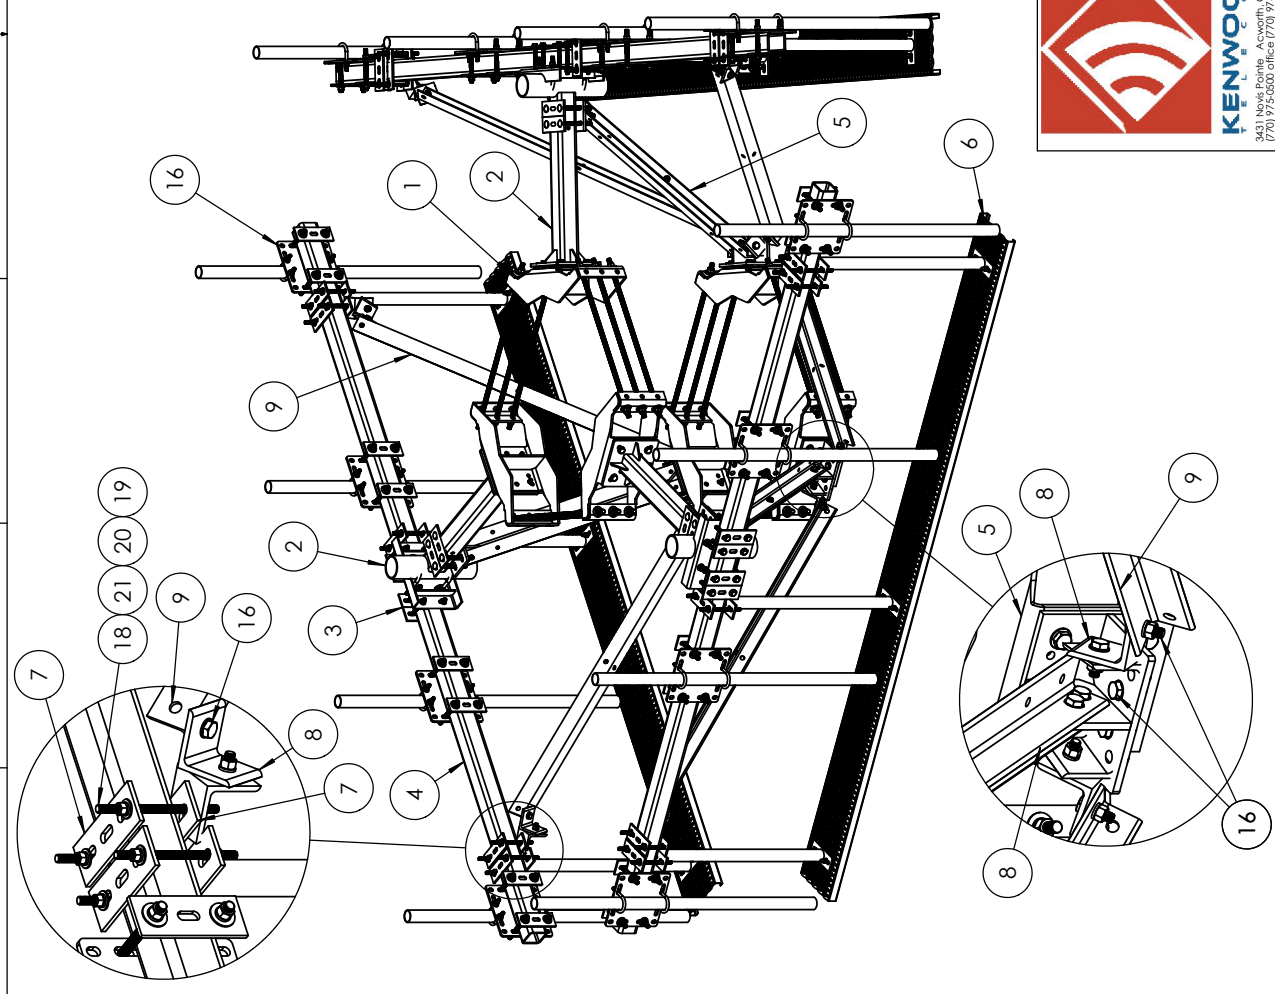

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL: 1/32 ANGULAR: ± 2° ONE PLACE DECIMAL: ± .06 TWO PLACE DECIMAL: ± .03 THREE PLACE DECIMAL: ± .010		NAME KAR	DATE 9/25/15
INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL: FINISH: DO NOT SCALE DRAWING		DRAWN CHECKED ENG APPR. MFG APPR.	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.		PROPRIETARY AND CONFIDENTIAL	
KENWOOD TELECOM		TITLE: Heavy Duty 3-Sector T-Arm Mount	
SCALE: 1:24 FINISHED WEIGHT: 2,270 lbs		SIZE DWG. NO. Z2016KTA	REV C
SHEET 1 OF 1			

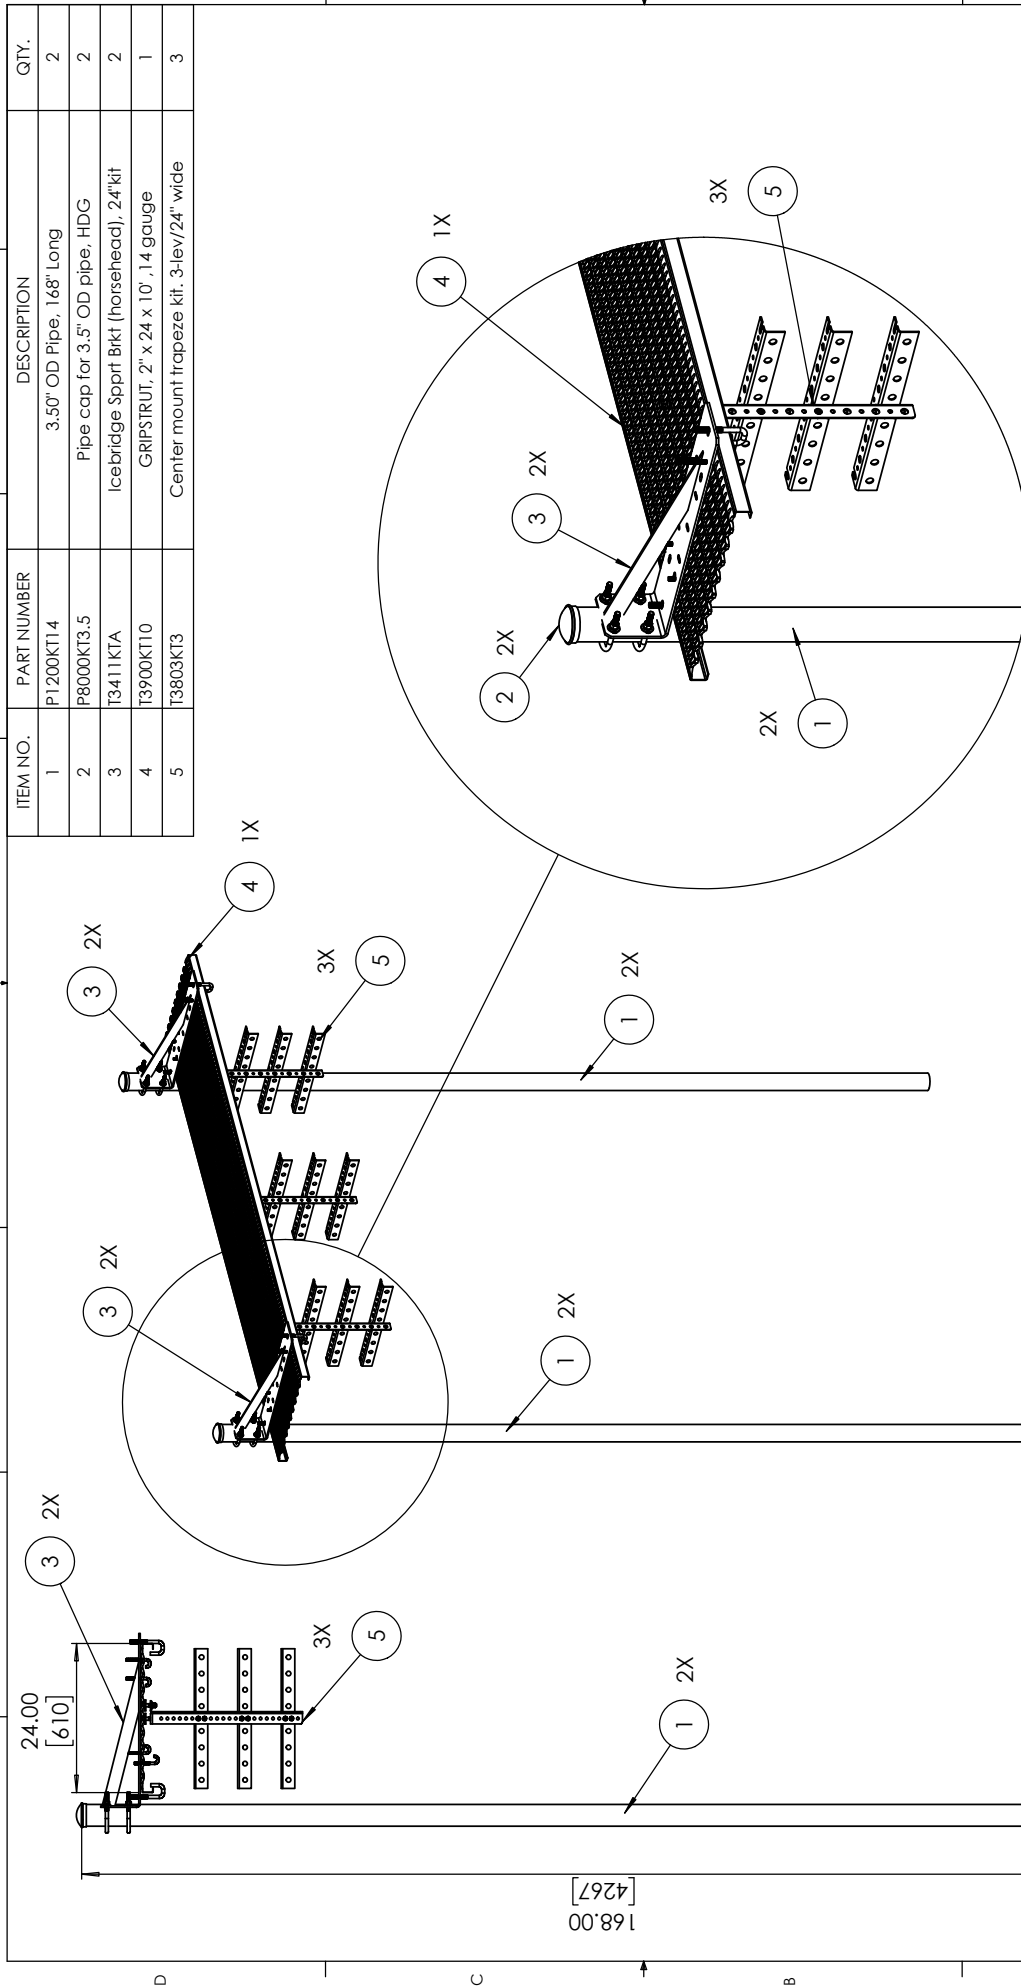

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	P1200KT14	3.50" OD Pipe, 168" Long	2
2	P8000KT3.5	Pipe cap for 3.5" OD pipe, HDG	2
3	T3411KTA	Icebridge Spprt Bkt (horsehead), 24"kit	2
4	T3900KT10	GRIPSTRUT, 2" x 24 x 10', 14 gauge	1
5	T3803KT3	Center mount trapeze kit, 3-lev/24" wide	3



3431 Nove Pointe Acworth, Gc 30101
(770) 775-5500 Office (770) 774-5100 Fax

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN INCHES
 DECIMALS: $\pm 1/32$
 FRACTIONAL: $\pm 1/32$
 ANGULAR: $\pm 2^\circ$
 ONE PLACE DECIMAL: $\pm .06$
 TWO PLACE DECIMAL: $\pm .03$
 THREE PLACE DECIMAL: $\pm .010$

INTERPRET GEOMETRIC TOLERANCING PER:
 MATERIAL:
 FINISH:
 DO NOT SCALE DRAWING

DATE 12/21/23
NAME KAR
DRAWN
CHECKED
ENG APPR.
MFG APPR.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.


SCALE: 1:25 FINISHED WEIGHT: 1

ITEM NO. 1
DESCRIPTION Icebridge Kit, 24" x 10', 3 vertical trapeze with (3) Level 14ft posts
QTY. 2

SIZE DWG. NO. T3424KT14-3C
REV -

SHEET 1 OF 1

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	P1200KT14	pipe, 3.5in od x .148in M HR x 14ft-0in	4
2	P8000KT3.5	Pipe cap for 3.5" OD pipe, HDG	4
3	T3900KT10	GRIPSTRUT, 2" x 24 x 10', 14 gauge	2
4	K3411KT24U	Universal horse head 24" HDG	8
5	P5001ER158HD	Unistrut, 1-5/8" x 1-5/8" x 10' Long, slotted	12
6	P9010ER3.0	pipe clamp, rigid pipe 3", zinc plated	48
7	P8000KT158R	End Cap, Red, 1-5/8" Unistrut	24
8	K2120KT6i	Threaded rod 1/2" x 6", HDG	16
9	H3012KT12GSAE	Flat washer, hardened, 1/2", SAE, HDG	32
10	H3002KT12G	Lock washer, 1/2" HDG	32
11	H2002KT12GA3	Nut, hex heavy 1/2" HDG A325	32
12	K9925KTA	j-Bolt assembly, 8 full thread, 3/8in with nut, lock, flat	32

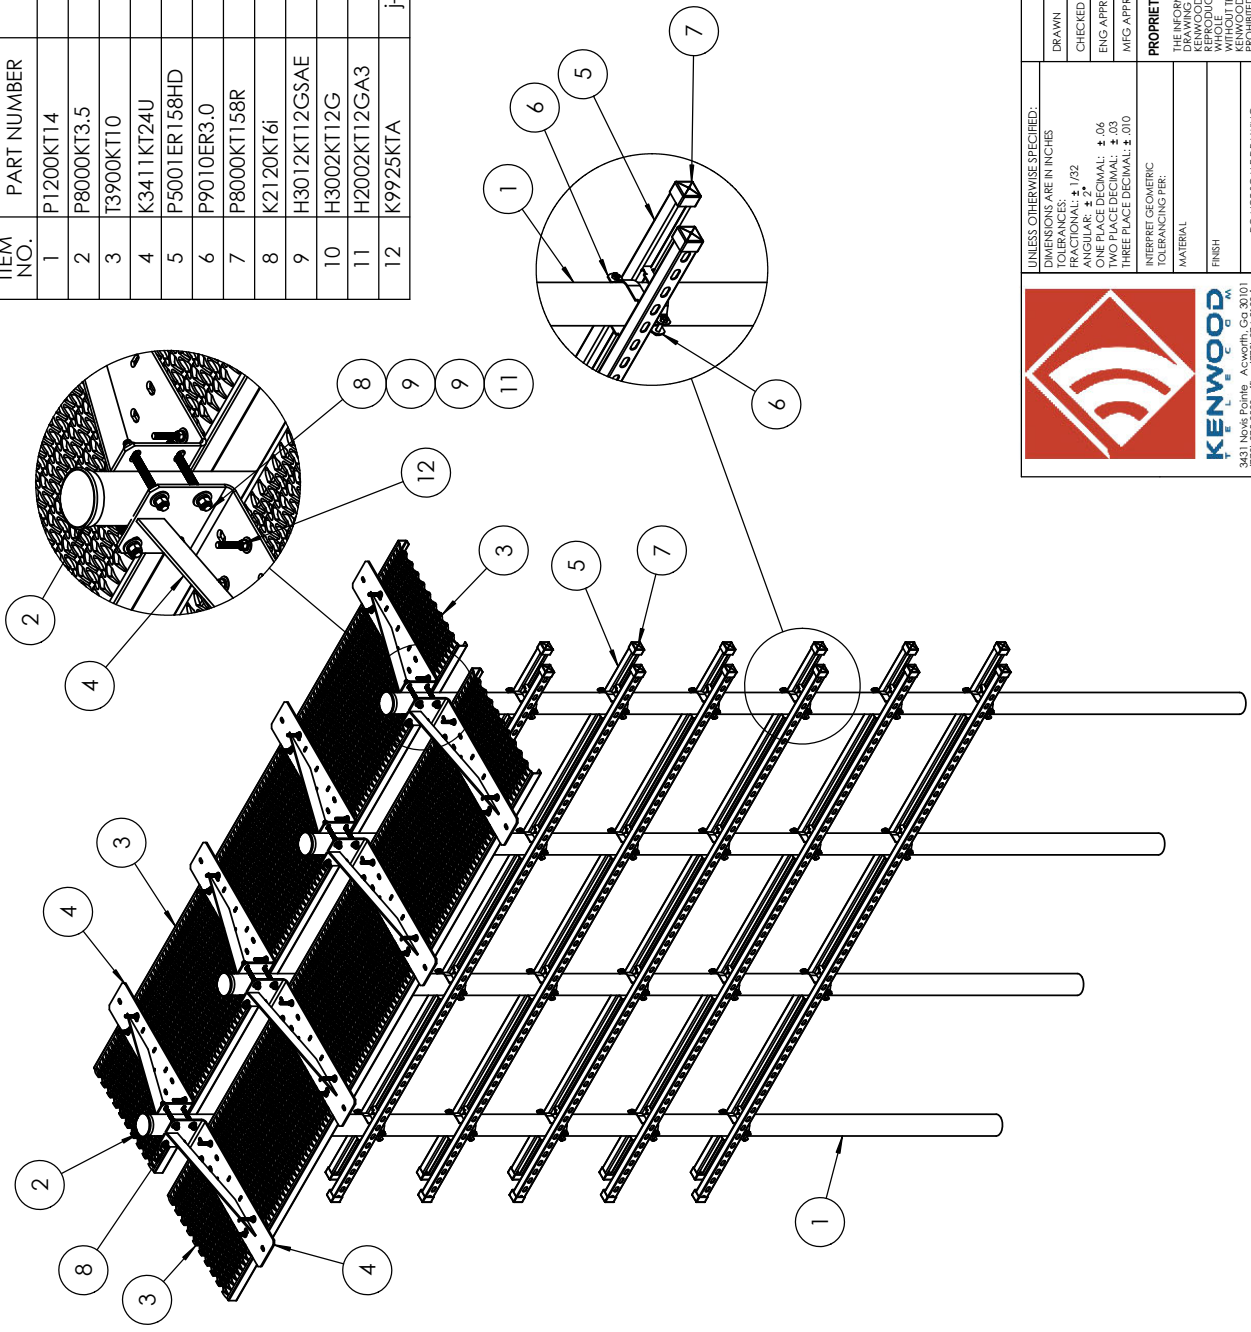

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES	
DECIMALS: $\pm .01$	FRACTIONAL: $\pm 1/32$
ANGULAR: $\pm 2'$	
ONE PLACE DECIMAL: $\pm .06$	ENG APPR.
TWO PLACE DECIMAL: $\pm .03$	
THREE PLACE DECIMAL: $\pm .010$	
INTERPRET GEOMETRIC TOLERANCING PER:	
MATERIAL:	
FINISH:	
DO NOT SCALE DRAWING	

NAME	DATE
KAR	12/21/23
DRAWN	CHECKED
ENG APPR.	MFG APPR.
PROPRIETARY AND CONFIDENTIAL	
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF KENWOOD TELECOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF KENWOOD TELECOM IS PROHIBITED.	

	
TITLE:	
VZW Double Ice Bridge Kit	
14' Post 12 Level H-Frame	
SIZE	REV
DWG. NO.	T2405KT14-VZW
SCALE: 1:20 FINISHED WEIGHT:	
SHEET 1 OF 1	

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



KENWOOD TELECOM
3431 NOVIS POINTE, ACWORTH, GA 30101
888-439-0500 OFFICE • 770-974-5100 FAX
WWW.KENWOODTELECOM.COM
SALES@KENWOODTELECOM.COM